

HC 158

Hydraulic Drifter



- Strong reputation in drilling industry with proven technology
- Easy to adapt on any machine
- Ready for any job

Highly versatile

- Multiple configurations available for all applications
- Compatible with all standard diameters for bolting and facedrilling
- Incorporates similar technologies as larger size drifters

Trouble-free

- Proven reliability and longer lifespan
- 35 years of continuous research, development and improvements

Multiple customizations

- Piston design can be adapted to ground typology and/or hydraulic oil supply
- Choose from a wide selection of front head material and shapes
- Wide rotation torque and rpm setup range

Weight and dimensions

Weight 190 kg (419 lb)

Rotation specs

Maximum rotation speed (RPM) 0-170 rpm

Maximum pressure (bar)

Maximum torque (Nm) 1225 Nm
(900 lb-ft)

Impact rating

Maximum output 21 kW (28 hp)

Percussion pressure range (max) 150 bar (2175 psi)


Maximum impact frequency (max) 38 Hz (2298 bpm)

Flushing flow and pressure

Water flushing 300 l/min

Other versions are available; please contact the drilling technical support team for more information.

Penetration rate

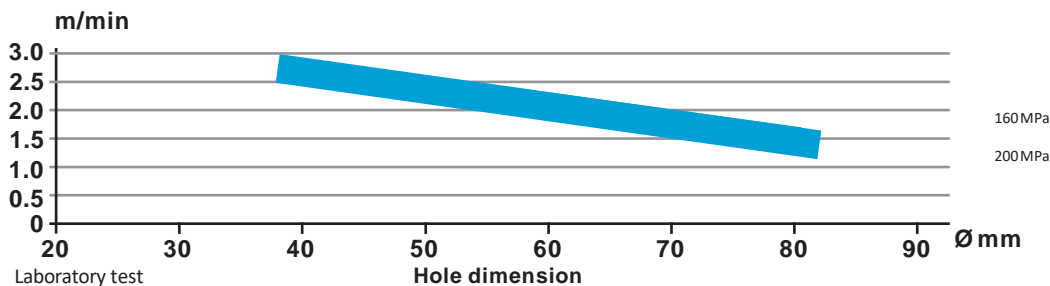

Shank adapters

R38 M

T38 M

T45 M